Uniform Mitigation Verification Inspection Form

	of this form and any	y documentation pro	vided with the insurance	ce policy			
Inspection Date:							
Owner Information							
Owner Name:			Contact Person:				
Address:			Home Phone:				
City:	Zip:		Work Phone:				
County:			Cell Phone:				
Insurance Company:			Policy #:				
Year of Home:	# of Stories:		Email:				
NOTE: Any documentation used in accompany this form. At least one p though 7. The insurer may ask add	photograph must acconitional questions regard	npany this form to valid ling the mitigated featu	date each attribute marke ure(s) verified on this forn	d in questions 3			
 Building Code: Was the structure the HVHZ (Miami-Dade or Browa □ A. Built in compliance with th 	ard counties), South Flori	ida Building Code (SFB)	C-94)?				
a date after 3/1/2002: Building	g Permit Application Dat	e (MM/DD/YYYY)//	/				
B. For the HVHZ Only: Built provide a permit application wC. Unknown or does not meet	ith a date after 9/1/1994	: Building Permit Applic					
	-		1. OD EDGA (DGD				
 Roof Covering: Select all roof covering identified. 							
2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance			
1. Asphalt/Fiberglass Shingle	/						
2. Concrete/Clay Tile							
☐ 3. Metal							
4. Built Up	/						
5. Membrane	/						
6. Other							
A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.							
☐ B. All roof coverings have a N roofing permit application after							
☐ C. One or more roof coverings	-		· "B".				
☐ D. No roof coverings meet the	requirements of Answer	r "A" or "B".					
3. Roof Deck Attachment : What is t	the weakest form of roof	deck attachment?					
A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c. by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalen mean uplift less than that required for Options B or C below.							
24"inches o.c.) by 8d common other deck fastening system of	B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesive other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails space a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.						
24"inches o.c.) by 8d common decking with a minimum of 2 Any system of screws, nails, a	24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue & Groov decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent						
Inspectors Initials/_ Property A	\ddress						

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155 Page 1 of 4

		or greater resistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at lea 182 psf.	ıst
		D. Reinforced Concrete Roof Deck.	
	П	E. Other:	
	П	F. Unknown or unidentified.	
		G. No attic access.	
4.		of to Wall Attachment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within et of the inside or outside corner of the roof in determination of WEAKEST type)	n
		A. Toe Nails	
		☐ Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached the top plate of the wall, or	to
		☐ Metal connectors that do not meet the minimal conditions or requirements of B, C, or D	
	Miı	imal conditions to qualify for categories B, C, or D. All visible metal connectors are:	
		☐ Secured to truss/rafter with a minimum of three (3) nails, and	
		Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.	
		B. Clips	
		☐ Metal connectors that do not wrap over the top of the truss/rafter, or	
		☐ Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the na position requirements of C or D, but is secured with a minimum of 3 nails.	ail
		C. Single Wraps Motel connectors consisting of a single stren that wrong over the ten of the truck/refter and is secured with	
	П	Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.	a
	Ш	D. Double Wraps	
		☐ Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or	1
		Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.	
		E. Structural Anchor bolts structurally connected or reinforced concrete roof.	
		F. Other:	
		G. Unknown or unidentified	
		H. No attic access	
5.		Geometry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall chost structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).	of
		A. Hip Roof Hip roof with no other roof shapes greater than 10% of the total roof system perimeter.	
		Total length of non-hip features: feet; Total roof system perimeter: feet B. Flat Roof Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of	
		less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof areasq ft C. Other Roof Any roof that does not qualify as either (A) or (B) above.	
6.	Sec	ondary Water Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR)	
		A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event of roof covering loss.	le
		B. No SWR.	
	Ш	C. Unknown or undetermined.	
Ins	spec	ors Initials Property Address	
*T	his v	erification form is valid for up to five (5) years provided no material changes have been made to the structure or	

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. **Opening Protection:** What is the <u>weakest</u> form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Glazed Openings				Non-Glazed Openings	
		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure						
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
I N	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection						

A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at
a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval
system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure
and Large Missile Impact" (Level A in the table above).

- Miami-Dade County PA 201, 202, and 203
- Florida Building Code Testing Application Standard (TAS) 201, 202, and 203

☐ A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist

- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
- Southern Standards Technical Document (SSTD) 12
- For Skylights Only: ASTM E 1886 and ASTM E 1996
- For Garage Doors Only: ANSI/DASMA 115

☐ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above				
☐ A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above				
B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):				
• ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile – 4.5 lb.)				
• SSTD 12 (Large Missile – 4 lb. to 8 lb.)				
• For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.)				
☐ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist				
\square B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above				
☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above				
C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).				

C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist

☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Property Address

the table above

Inspectors Initials

N. Exterior Opening Protection (unverified shutter's protective coverings not meeting the requirements of Al with no documentation of compliance (Level N in the ta	nswer "A", "B", or C" or sy	tation) Al ystems tha	l Glazed openings are protected with appear to meet Answer "A" or "B"		
N.1 All Non-Glazed openings classified as Level A, B, C, o	or N in the table above, or no N	Non-Glazed	l openings exist		
☐ N.2 One or More Non-Glazed openings classified as Level table above					
☐ N.3 One or More Non-Glazed openings is classified as Leve	el X in the table above				
X. None or Some Glazed Openings One or more Glaze	ed openings classified and	Level X in	the table above.		
MITIGATION INSPECTIONS MUST E Section 627.711(2), Florida Statutes, prov	~				
Qualified Inspector Name:	License Type:		License or Certificate #:		
Inspection Company:		Phone:			
Qualified Inspector – I hold an active license as a	: (check one)				
Home inspector licensed under Section 468.8314, Florida Statute training approved by the Construction Industry Licensing Board	es who has completed the statu		er of hours of hurricane mitigation		
Building code inspector certified under Section 468.607, Florida					
General, building or residential contractor licensed under Section					
Professional engineer licensed under Section 471.015, Florida Se					
Professional architect licensed under Section 481.213, Florida St					
Any other individual or entity recognized by the insurer as posses verification form pursuant to Section 627.711(2), Florida Statute		ons to prop	perly complete a uniform mitigation		
Individuals other than licensed contractors licensed under					
under Section 471.015, Florida Statues, must inspect the str					
<u>Licensees under s.471.015 or s.489.111 may authorize a direxperience to conduct a mitigation verification inspection.</u>	ect employee who possess	es the rec	msite skin, knowledge, and		
	d I	J 4h a im an			
I, am a qualified inspector a	ma i personany periorine	a me msp	dection of (ucensea		
contractors and professional engineers only) I had my emplo	oyee ((print name		form the inspection etor)		
and I agree to be responsible for his/her work.		•	,		
Qualified Inspector Signature:	Date:				
An individual or entity who knowingly or through gross ne subject to investigation by the Florida Division of Insurance					
appropriate licensing agency or to criminal prosecution. (S					
certifies this form shall be directly liable for the misconduc performed the inspection.	t of employees as if the au	ıthorized	mitigation inspector personally		
Homeowner to complete: I certify that the named Qualifie	d Inspector or his or her ar	nlovoo di	d parform an inspaction of the		
residence identified on this form and that proof of identificatio	n was provided to me or m	y Authori	zed Representative.		
Signature: Date:					
An individual or entity who knowingly provides or utters a false or fraudulent mitigation verification form with the intent to					
obtain or receive a discount on an insurance premium to which the individual or entity is not entitled commits a misdemeanor					
of the first degree. (Section 627.711(7), Florida Statutes)					
The definitions on this form are for inspection purposes on as offering protection from hurricanes.	ly and cannot be used to o	certify an	y product or construction feature		
Inspectors Initials Property Address					
*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or					
inaccuracies found on the form.					

Page 4 of 4

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155













































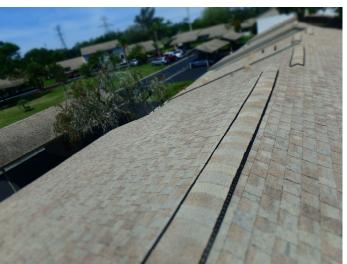








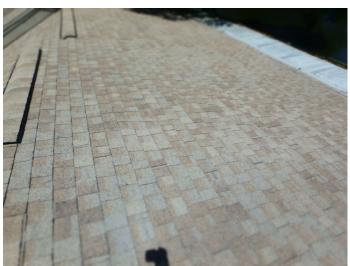









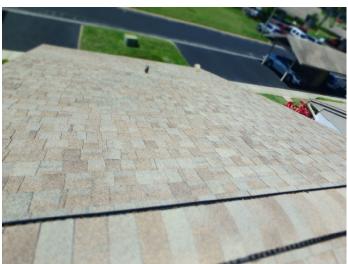





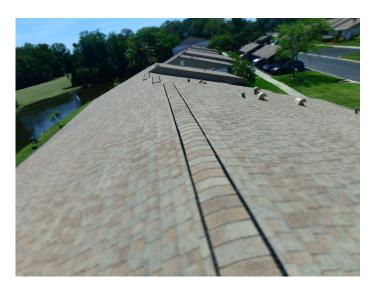

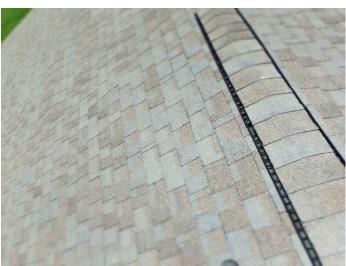












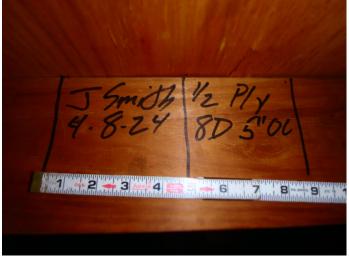



























Accessibility Assistance | Announcements(2)

Register for an Account Reports (2) Login
Instructions and Help |

Search... Q

<u>Home Air Quality Build Code Enforce Consumer Protect Develop Environment Fertilizer</u>

Plan <u>Utilities</u> <u>PCCLB</u> <u>Water/Nav</u>

Search Permits Schedule an Inspection

Record PER-H-CB07-14996: Building Combo Permit Record Status: Finaled

Record Info

Payments ~

Work Location

100 MICHAELS CIR *

Oldsmar FL 34677

View Additional Locations>>

Record Details

Replacing a **water heater, AC unit** or **water softener**? Virtual inspections are now available for these permit types. <u>Learn more</u>.

Virtual inspections will be available for more permit types soon.

Licensed Professional:

Phone:9389565

HOUSH JAMES HOUSH JAMES ARRY'S ROOFING SERVICES TS, FL, 34689

Project Description:

Building Combination RFCSH REROOF 71SQS GAF DIM SHINGLES 4/12 BUILDING CCC1326986

View Additional Licensed Professionals>>

- **▼**More Details
 - **■** Additional Information

Job Value(\$):

\$16,401.00

- Application Information
- Parcel Information



PINELLAS COUNTY WEBSITE ACCESSIBILITY ASSISTANCE

INSTRUCTIONS AND HELP

PRIVACY POLICY

DISCLAIMER CONTACT US